


Sample Valves

- Sizes available 3/8" and 1"
- Material:304 stainless steel
- Double silicone O-rings
- Silicone or PTFE seat ensures a leak-proof shut-off
- Surface finish polished to sanitary standards
- Temperature rating: 300° F
- Pressure rating: 200PSI



Dimenstions

Size	Style	Seat Material	Weight (lbs.)
3/8"	NPT	Silicone	0.72
3/8"	NPT	PTFE	0.72
1"	Clamp	Silicone	0.88
1"	Clamp	PTFE	0.88
1"	Weld	Silicone	0.72
1"	Weld	PTFE	0.72

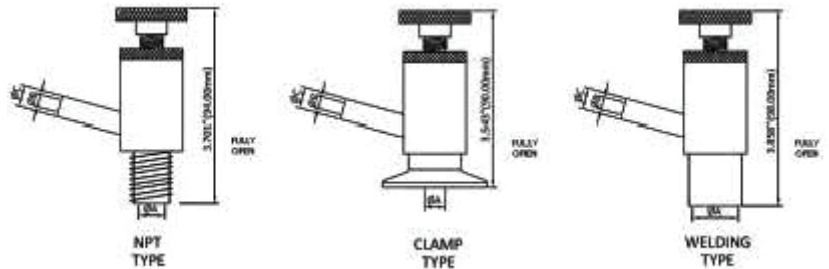


Specifications

Size	Style	φ A	φ B	φ C	Open
1/4"	NPT	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.701"(94.0mm)
3/8"	NPT	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.701"(94.0mm)
1/2"	NPT	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.701"(94.0mm)
	Clmap	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.543"(90.0mm)
	Welding	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.858"(98.0mm)
3/4"	NPT	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.701"(94.0mm)
	Clmap	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.543"(90.0mm)
	Welding	0.620"915.8mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.858"(98.0mm)
1"	NPT	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.701"(94.0mm)
	Clmap	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.543"(90.0mm)
	Welding	0.870"(22.1mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.858"(98.0mm)
1 1/2"	NPT	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.701"(94.0mm)
	Clmap	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.543"(90.0mm)
	Welding	1.370"(34.8mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.858"(98.0mm)
2"	NPT	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.701"(94.0mm)
	Clmap	0.370"(9.4mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.543"(90.0mm)
	Welding	1.870"(47.5mm)	0.236"(6.0mm)	0.394"(10.6mm)	3.858"(98.0mm)

Sample Valves

Material List

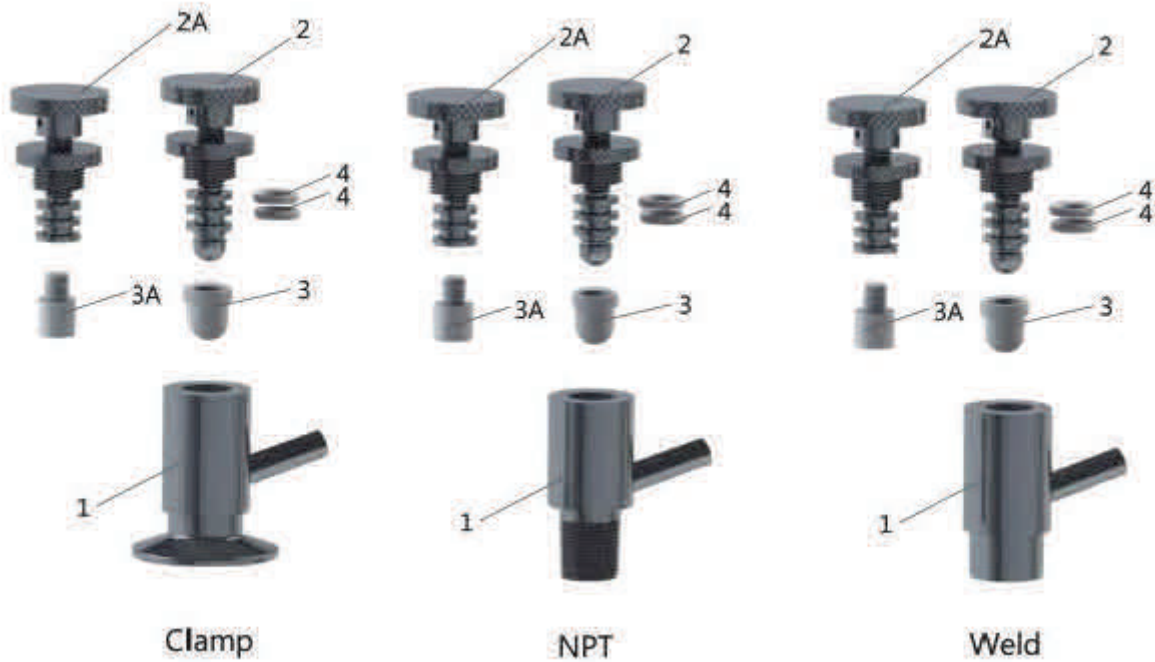

Item	Description	Material	Quantity
1	clamp-body	304	1
1	NPT-body	304	1
1	weld-body	304	1
2	knob/stem assembly	304	1
2A	knob/stem assembly	304	1
3	seat	silicone	1
3A	seat	PTFE	1
4	O-ring	silicone	2